


CA-360Q KY Kit C

Landline, Smoke/CO and Doorbell Notification System
for Deaf, Hard of Hearing and Deaf Blind users

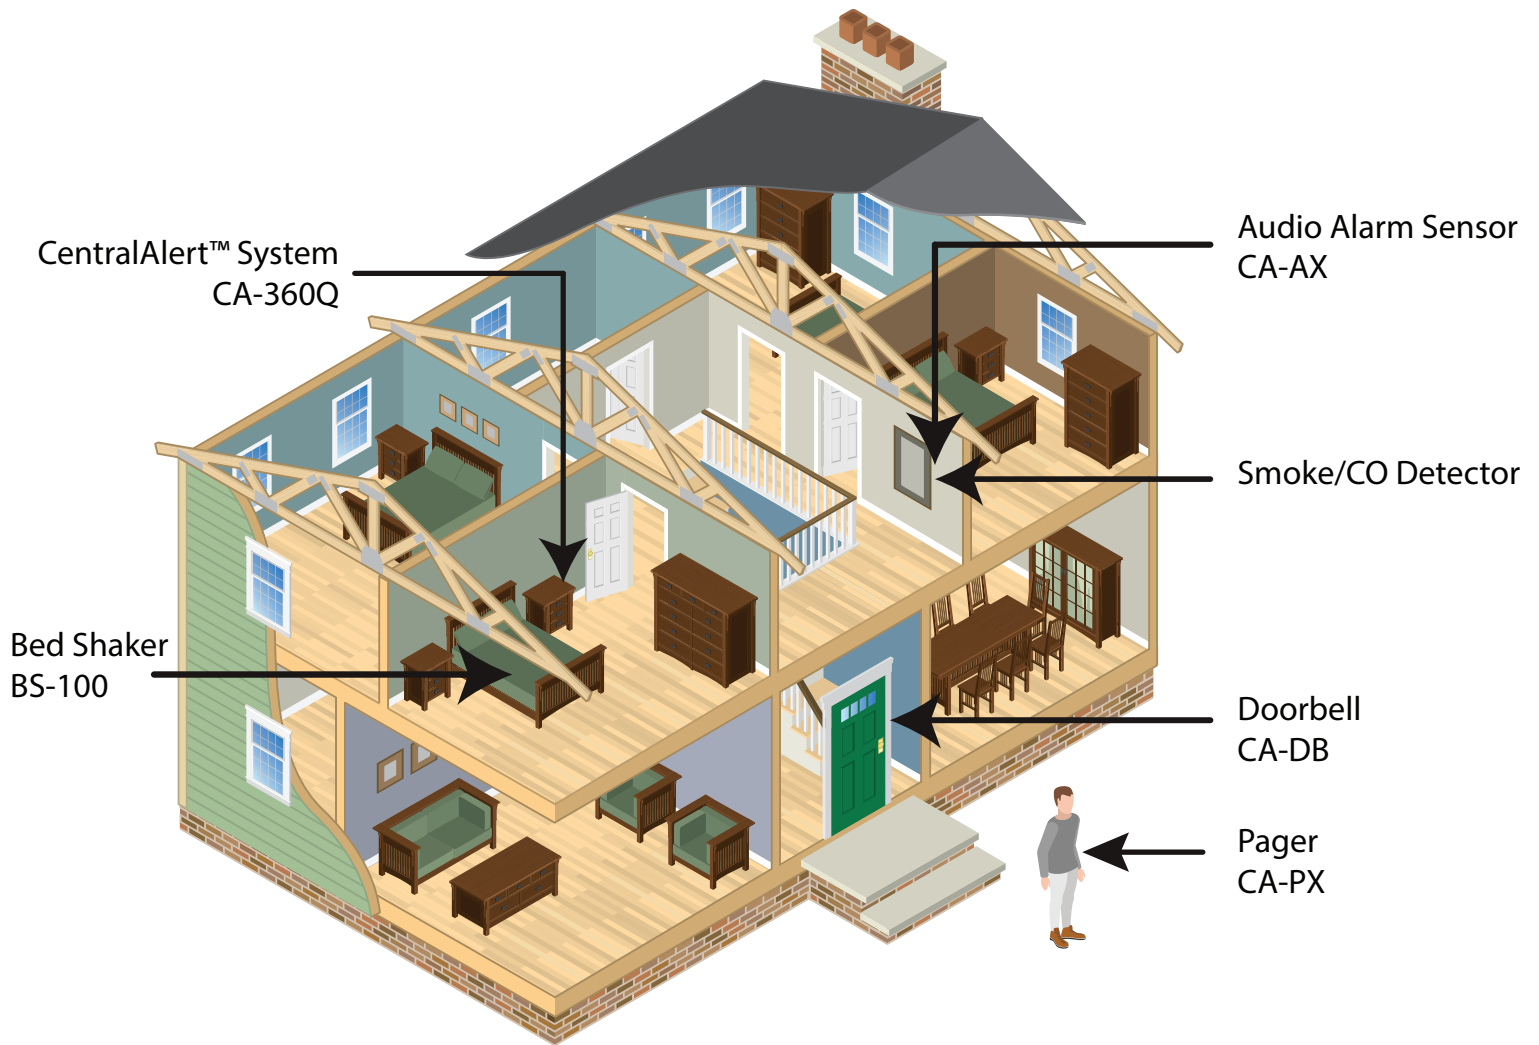

The CA-360Q not only wakes you up for work or school with its built-in alarm clock, it becomes the CentralAlert™ receiver for your entire home. This customized kit alerts you to all types of events in your home such as the door bell, telephone ringing and smoke/CO alarm. With the CA-PX pager, you have the freedom to go anywhere in the home, even outside, without missing any alerts in the home.*

**150 ft range between transmitters and receivers. Actual distance varies according to house construction.*

CA-360Q

The CA-360Q provides bright flashing patterns and adjustable ring tones to alert you to an incoming call, doorbell or smoke alarm. Connect the included BS-100 Bed Shaker to be alerted to all of those same events, even while you sleep. 150 foot range between transmitters and receivers.

CA-PX

The CA-PX is a wearable, tactile pager with Braille buttons providing a complete notification system that receives alerts about activities occurring in the home. Receive alerts through strong, easily identifiable vibrations, selectable audio tones and a bright flasher.

CA-AX

The CA-AX Fire Alarm Transmitter can be placed next to any smoke or CO detector which sends an immediate signal to both the CA-360Q and the CA-PX pager if the smoke or CO detector is activated.

Smoke/CO

The Smoke/CO detector offers both smoke and carbon monoxide detection. A 10-Year Lithium battery comes pre-installed.

CA-360Q KY Kit C

Landline, Smoke/CO and Doorbell Notification System
for Deaf, Hard of Hearing and Deaf Blind users



CA-360Q

Weight:	5 lbs (2.27 kg)	
Phone Jack Type:	RJ-11	
Lamp Jack:	9 V dc, 150 mA	
Bedshaker Output:	9 V dc, 150 mA	
Technology:	2.4 GHz Smart Code	
Dimensions:	6.5" x 4.5" x 2.25" (165 x 114 x 57 mm)	
NOAA Input Jack:	Impedance >5.6k ohm, 15 V dc max	
Battery Back-Up:	4 AA size NiMH batteries (Not Included)	
Operating Temperature:	50°F (10°C) to 86°F (30°C)	
Storage Temperature:	50°F (10°C) to 104°F (40°C)	
Doorbell:	CR2032 Lithium Battery Included	
DC Input:	9 V dc, 1,000 mA dc	

*150 ft range between transmitters and receivers. Actual distance varies according to house construction.

CA-AX

Technology:	2.4 GHz Smart Code	
Bed Shaker Output:	5 V dc, 150 mA	
Battery Type:	Two AA size Alkaline	
Battery Life:	Up to 10 months	
Operating range:	Up to 200 ft*	
AC Adapter Input:	100-240 V AC, 50 / 60 Hz	
AC Adapter Output:	5V dc 600-1000 mA	
Operating temperature:	50°F (10°C) to 86°F (30°C)	
Dimensions:	2.5" x 3.8" x 1.0" (64 x 97 x 25 mm)	
Battery Use Time:	3 to 6 days depending on usage	
Weight:	4 oz (113 grams)	

*150 ft range between transmitters and receivers. Actual distance varies according to house construction.

Smoke/CO

Battery Type:	Sealed Lithium Battery	
Battery Life:	10 Years	
Smoke Sensor:	Photoelectric	
CO Sensor:	Electrochemical	
Audio Alarm:	85 dB at 10ft	
Temperature Range:	40°F (4.4°C) to 100°F (37.8°C)	
Dimensions:	5.22" x 1.6" (133 x 41 mm)	
Weight:	1 lbs (454 grams)	
Interconnects:	No	

CA-PX

Technology:	2.4 GHz Smart Code	
Bed Shaker Output:	5 V dc, 150 mA	
AC Adapter Output:	5 V dc, 600-1,000 mA	
Battery Type:	3 x AAA Size NiMH Rechargeable	
Battery Use Time:	3 to 6 days depending on usage	
AC Adapter Input:	100-240 V AC, 50 / 60 Hz	
Dimensions:	2.25" x 4.25" x 1.25" (57 x 108 x 32 mm)	
Operating temperature:	50°F (10°C) to 104°F (40°C)	
Weight:	3.9 oz (110 grams)	

*150 ft range between transmitters and receivers. Actual distance varies according to house construction.