


CA-380 KY Combo 1

Landline, Mobile Device, Smoke/CO2 and Doorbell Notification System for Deaf, Hard of Hearing and Deaf Blind users

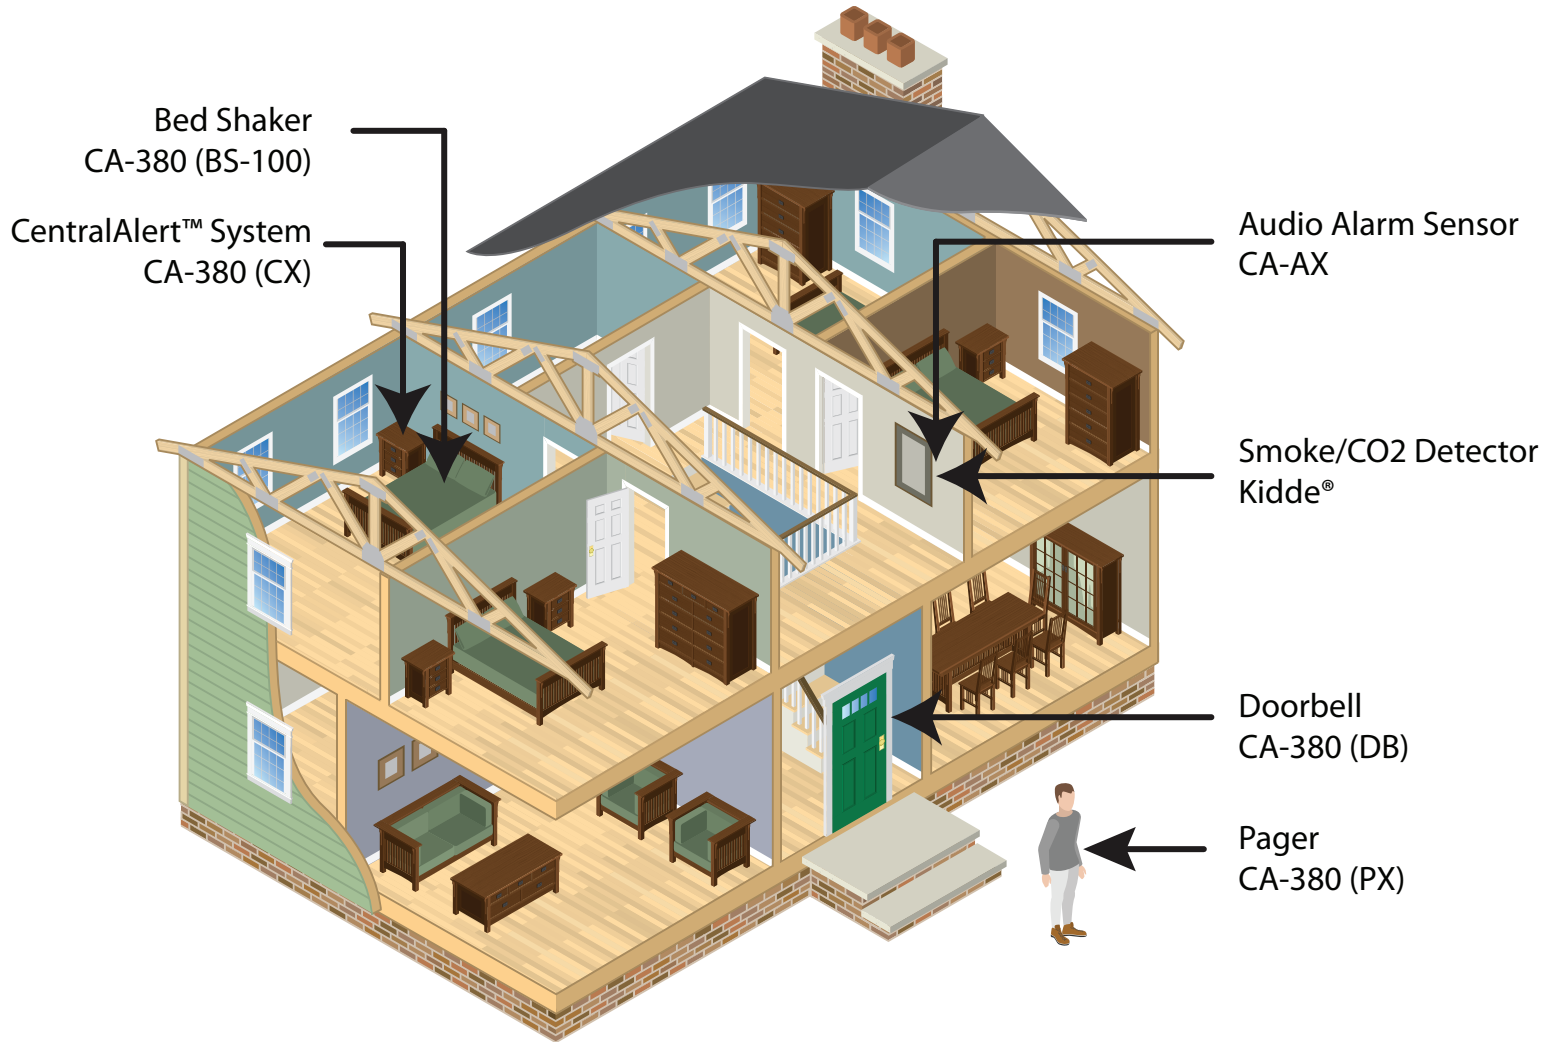

The CentralAlert™ CA-380 is your CentralAlert™ receiver for for your entire home, including your mobile device and other transmitters throughout the home. This customized kit alerts you to all types of events in your home such as the door bell, both landline and mobile telephone ringing and smoke/CO2 alarm. With the CA-PX pager, you have the freedom to go anywhere in the home, even outside, without missing any alerts in the home.*

**150 ft range between transmitters and receivers. Actual distance varies according to house construction.*

CA-380

The CA-380 includes the CA-CX, CA-DB, CA-PX and BS-100 and alerts you to any incoming call, text message, doorbell or smoke alarm. Connect the included BS-100 Bed Shaker to be alerted to all of those same events, even while you sleep.
*150 foot range between transmitters and receivers.

CA-PX

The CA-PX is a wearable, tactile pager with Braille buttons providing a complete notification system that receives alerts about activities occurring in the home. Receive alerts through strong, easily identifiable vibrations, selectable audio tones and a bright flasher.

CA-AX

The CA-AX Fire Alarm Transmitter can be placed next to any smoke or CO2 detector which sends an immediate signal to both the CA-360 and the CA-PX pager if the smoke or CO2 detector is activated.

Smoke/CO2

The Kidde® Smoke/CO2 detector offers both smoke and carbon monoxide detection. A 10-Year Lithium battery comes pre-installed.

CA-380 KY Combo 1

Landline, Mobile Device, Smoke/CO2 and Doorbell Notification System for Deaf, Hard of Hearing and Deaf Blind users




Always Hear for You




*iPhone® not included.

CA-380

Weight:	0.5 lbs (225 grams)	
USB Charger Output:	5V dc 650 mA max	
Phone Jack Type:	RJ-11	
Bedshaker Output:	9 V dc, 150 mA	
Technology:	2.4 GHz Smart Code	
Dimensions:	4.6" x 3.3" x 3.5" (116 x 85 x 90 mm)	
NOAA Input Jack:	Impedance >5.6k ohm, 15 V dc max	
Battery Back-Up:	4 AA size Alkaline batteries (Not Included)	
Operating Temperature:	50°F (10°C) to 104°F (40°C)	
Doorbell:	CR2032 Lithium Battery Included	
DC Input:	9 V dc, 100 mA	


*150 ft range between transmitters and receivers. Actual distance varies according to house construction.

CA-AX


Technology:	2.4 GHz Smart Code	
Bed Shaker Output:	5 V dc, 150 mA	
Battery Type:	Two AA size Alkaline	
Battery Life:	Up to 10 months	
Operating range:	Up to 200 ft*	
AC Adapter Input:	100-240 V AC, 50 / 60 Hz	
AC Adapter Output:	5V dc 600-1000 mA	
Operating temperature:	50°F (10°C) to 86°F (30°C)	
Dimensions:	2.5" x 3.8" x 1.0" (64 x 97 x 25 mm)	
Battery Use Time:	3 to 6 days depending on usage	
Weight:	4 oz (113 grams)	

*150 ft range between transmitters and receivers. Actual distance varies according to house construction.

Smoke/CO2

Battery Type:	Sealed Lithium Battery	
Battery Life:	10 Years	
Smoke Sensor:	Photoelectric	
CO Sensor:	Electrochemical	
Audio Alarm:	85 dB at 10ft	
Temperature Range:	40°F (4.4°C) to 100°F (37.8°C)	
Dimensions:	5.22" x 1.6" (133 x 41 mm)	
Weight:	1 lbs (454 grams)	
Interconnects:	No	

CA-PX

Technology:	2.4 GHz Smart Code	
Bed Shaker Output:	5 V dc, 150 mA	
AC Adapter Output:	5 V dc, 600-1,000 mA	
Battery Type:	3 x AAA Size NiMH Rechargeable	
Battery Use Time:	3 to 6 days depending on usage	
AC Adapter Input:	100-240 V AC, 50 / 60 Hz	
Dimensions:	2.25" x 4.25" x 1.25" (57 x 108 x 32 mm)	
Operating temperature:	50°F (10°C) to 104°F (40°C)	
Weight:	3.9 oz (110 grams)	

*150 ft range between transmitters and receivers. Actual distance varies according to house construction.